


REV.	ECO.	NO.	APPD
A	REL.	LARRY	02/06/20

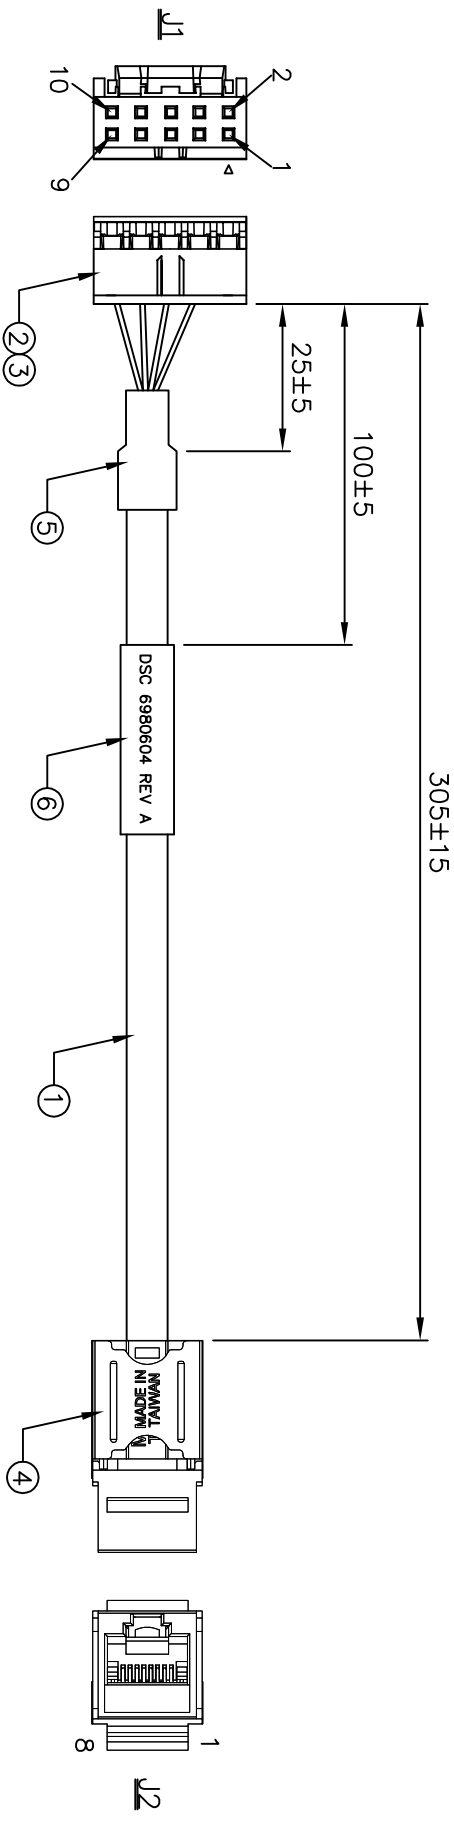


10	BROWN	TWIST PAIR	8
9	BROWN/WHITE	TWIST PAIR	7
8	BLUE(or BLACK)	TWIST PAIR	5
7	BLUE(or BLACK)/WHITE	TWIST PAIR	4
6	GREEN	TWIST PAIR	6
5	GREEN/WHITE	TWIST PAIR	3
4	ORANGE	TWIST PAIR	2
3	ORANGE/WHITE	TWIST PAIR	1
J1	WIRE COLOR		J2

● WIRE COLOR JUST FOR REFERENCE ONLY

NOTES:

1. ALL DIMENSIONS ARE "MM".
2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
3. CONDUCTION RESISTANCE:20 MAX
4. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.
5. PACKAGE:IPC/BAG.



DETAIL "A"

6	LABEL	1PC	W=30.0MM, L=40.0MM, CONTENT SEE "A"
5	H.S. TUBE	1PC	HEAT SHRINK TUBE 6φ*15MM COLOR BLACK
4	RJ 45 JACK	1SETS	KEYSTONE RJ45 8P8C JACK P/N EKTYN-U1WH OR EQ
3	CRIMP TERMINAL	10PCS	CRIMP CONTACT FCI P/N 77138-001LF
2	10P HOUSING	1PC	2MM 2X5P BLACK FCI P/N 10073599-010LF
1	CABLE	1PC	CAT 5E UTP*4PAIRS JACKET:PVC, COLOR:GRAY
NO.	ITEM	Q'TY	DESCRIPTION



X:±	.XX:±	X':±	.XX':±	PART NO.(INTENDED USE)	TITLE:
X:±0.5	.XXX:±	X':±	.XXX':±	6980604 REV A	CABLE, FCI 2MM 10P TO RJ PANEL MOUNT
APPD:	LARRY	02/06/20	DWG NO.:	GL-GH838	
CHKD:	WUZUJIAN	02/06/20	DR:	AARON	02/06/20
SCALE	SHEET	REV.			
NONE	1/1	A			